
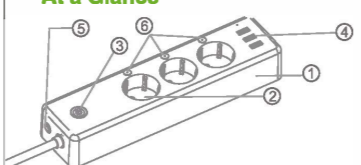



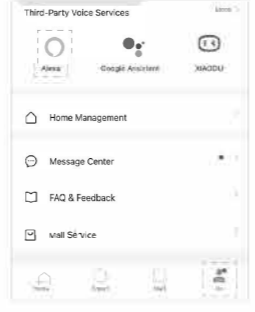
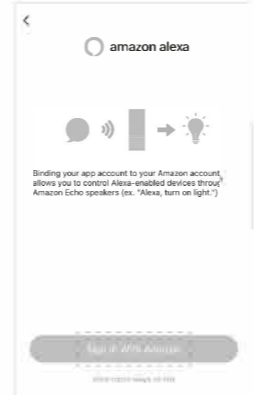
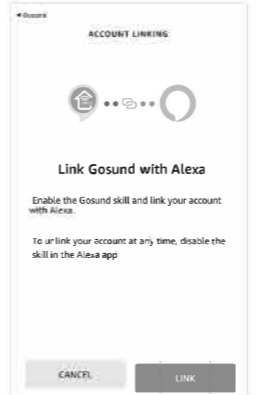
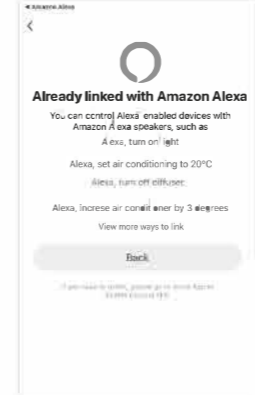
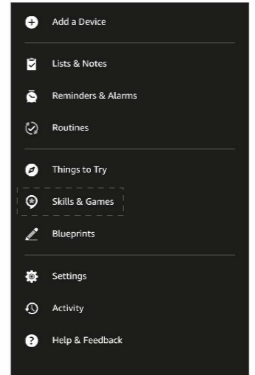

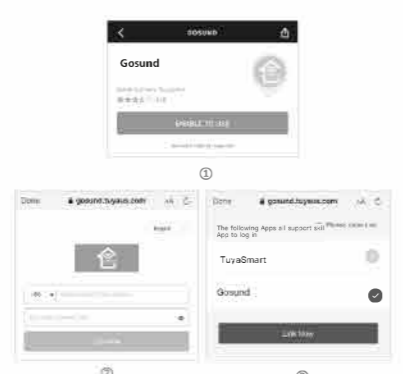

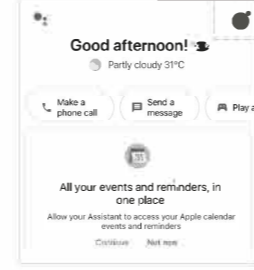
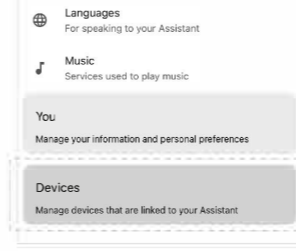





 <p><b>Smart Power Strip P1</b> Any problems please follow Gosund on  and consult the service staff</p>	<p><b>What's in the Box</b> 1. Smart Plug 2. User Manual</p> <p><b>At a Glance</b></p>  <ol style="list-style-type: none"> <li>VO Flame Resistant Material</li> <li>Socket Panel</li> <li>ON/OFF/RESET Button</li> <li>USB Ports</li> <li>Air Circuit-Breaker</li> <li>ON/OFF Button</li> </ol> <p><b>Note:</b> Socket can be controlled individually. You can also control it individually in APP.</p>	<p><b>Specification</b> Model: P1 Input: 100-240V~, 50/60Hz Output: 15A Max. USB ports: 5V/3.1A Material: PC (V0 Fireproof, UV resistant) Wi-Fi Network: 802.11 b/g/n, 2.4GHz(only) Product Size: 10x10x3cm(5ft Cord) Frequency Range: 2412-2472 MHz</p> <p><b>Main Features</b></p> <ul style="list-style-type: none"> <li>Voice Control</li> <li>App Control</li> <li>Scheduled Control</li> <li>Family Share</li> <li>Energy Monitoring</li> <li>Extend 3 Sockets</li> </ul>	<p><b>Reset</b></p> <ol style="list-style-type: none"> <li>Turn on the power, hold the button for 5 seconds till the socket led starts to flash. The reset is successful.</li> <li>When the socket is in a new network environment, you need to restore the factory settings, and then reconnect to the network.</li> </ol> <p><b>Warnings and Precautions Important!</b></p> <ul style="list-style-type: none"> <li>Keep it out of the reach of children and pets.</li> <li>Do not use this product in humid environments or outdoors. It's for indoor use only.</li> <li>Do not place this product near heating devices, such as microwave ovens, or radiators.</li> <li>Protect the product from extreme</li> </ul>	<p>temperature direct sunlight, strong jolts high humidity, moisture, flammable gases, vapors and solvents.</p> <ul style="list-style-type: none"> <li>Do not disassemble, modify, or repair your device, and ask help from the authorized professionals for device malfunction.</li> <li>Do not use the device when it is no longer working properly or visibly damaged.</li> <li>Do not store the device for extended periods in poor ambient conditions.</li> <li>Do not insert your device to another one.</li> <li>Never use aggressive detergents such as rubbing alcohol or other chemical solutions because these could damage the casing or even impair the functioning of the product.</li> <li>Do not connect in series.</li> <li>Do not cover the product when in use.</li> <li>When multiple plugs are inserted at</li> </ul>	<p>the same time, the total power shall not exceed the maximum power.</p> <ul style="list-style-type: none"> <li>The power strip cannot be coiled for use. If used in coil, the actual current value will be lower than its rated value.</li> </ul> <p><b>How to download the APP?</b> Option1: Search for "Gosund" in the Apple APP Store or Google Play. Option2: Scan the QR code to enter the download page.</p>  <p>APP Download</p>	<p>After download APP and login, make sure the indicator under blinking, then please use our APP "Add device" then scan the QR code and get into Quick Pairing, connect the device and APP. If you meet any issue, contact us via official website or APP.</p>  <p>Wi-Fi Pairing</p>
<p><b>Binding Voice Assistants Guide</b></p>  <p>Since the device only supports 2.4G Wi-Fi connection, please ensure that the mobile phone and the device are connected to 2.4G Wi-Fi simultaneously.</p>	<p><b>How to Connect Gosund Devices to Alexa?</b></p> <p><b>Note:</b> 1. Please download the Amazon Alexa APP before connecting, and make sure that the Alexa account is successfully logged in. 2. Make sure that the Alexa speaker and the device to be bound are powered on and connected to the Wi-Fi network.</p>	<p><b>Method 1: Bind quickly via Gosund APP.</b></p> <ol style="list-style-type: none"> <li>Open the Gosund APP, click "Me" in the lower right corner, and then click the "Alexa" icon in the "Third-Party Voice Services" menu.</li> </ol> <p><b>Note:</b> Please update the APP to version 3.22.5 or above.</p> 	<ol style="list-style-type: none"> <li>Click "Sign In With Amazon" at the bottom of the page.</li> </ol> 	<ol style="list-style-type: none"> <li>Click "LINK" at the bottom of the page.</li> </ol> 	<ol style="list-style-type: none"> <li>Bind successfully, the device can be controlled by Alexa.</li> </ol> 	<p><b>Method 2: Add skills via Alexa APP.</b></p> <ol style="list-style-type: none"> <li>Open Amazon Alexa APP and select "Skills &amp; Games", as shown in the figure below.</li> </ol> 

<ol style="list-style-type: none"> <li>Click "Search" icon and enter "Gosund", as shown in the following figure.</li> </ol> 	<ol style="list-style-type: none"> <li>Find "Gosund", click "enable" and contact your Gosund account to enable skill. As shown in the figure below:</li> </ol> 	<ol style="list-style-type: none"> <li>Then the device can be controlled through Alexa.</li> </ol>  <ol style="list-style-type: none"> <li>Now you can begin your smart home journey.</li> </ol>	<p><b>How to Connect Devices to Google Assistant.</b></p> <p><b>Note:</b> Support 2.4GHz Wi-Fi only.</p> <ol style="list-style-type: none"> <li>Open the Google Assistant APP and login in.</li> <li>Tap your account name of the upper right corner.</li> </ol> 	<ol style="list-style-type: none"> <li>Click "Devices" to add devices.</li> </ol> 	<ol style="list-style-type: none"> <li>Find "Link a smart home device" and click it.</li> </ol>  <ol style="list-style-type: none"> <li>Enter "Gosund" to search and click the "Gosund smart".</li> </ol> 	<ol style="list-style-type: none"> <li>Enter your Gosund APP account and password, then tap "Link Now".</li> </ol>  <ol style="list-style-type: none"> <li>Now you can begin your smart home journey.</li> </ol>
<p>For more operation videos, please scan the QR code below.</p>  <p>Video Instructions</p>	<p><b>WEEE Disposal and Recycling Information.</b></p> <p>All products bearing this symbol are waste electrical and electronic equipment (WEEE as in directive 2012/19/EU) which should not be mixed with unsorted household waste. Instead, you should protect human health and the environment by handing over your waste equipment to a designated collection point for the recycling of waste electrical and electronic equipment, appointed by the government or local authorities. Correct disposal and recycling will help prevent potential negative consequences to the environment and human health. Please contact the installer or local authorities for more information about the location as well as terms and conditions of such collection points.</p>	<p><b>FAQ</b></p> <ol style="list-style-type: none"> <li><b>Question:</b> The smart power strip showing offline or disconnect from WIFI. <b>Answer:</b> 1) Please ensure the wifi connection is stable and the router is not far or overloaded. Please restart your router or connect the device to a mobile wifi hotspot to see if it works. 2) Please remove the device from the App. Click the device name -&gt; click on edit icon (at top right)-&gt;click "Remove Device (at bottom)"-&gt; "Disconnect and wipe data". 3) Please reset it before connecting it to the App again. Simply press the power button (for about 10 seconds). The smart power strip indicator will blink rapidly (EZ mode) or slowly (AP mode).</li> <li><b>Question:</b> Smart power strip will turn on and off by itself randomly. What should I do to fix this?</li> </ol>	<p><b>Answer:</b></p> <ol style="list-style-type: none"> <li>Please check first have you set any schedules for ON/OFF on APP?</li> <li>Could you please try the below steps to plug it in another socket? a: Please remove the device from the app. Click the device name -&gt; click on edit icon (at top right)-&gt;click "Remove Device (at the bottom)"-&gt; "Disconnect and wipe data". b: Please reset it before connecting it to the app again. Simply press the power button (for about 10 seconds). The smart power strip indicator will blink rapidly (EZ mode) or slowly (AP mode). c: If the issue persists, please restart your router or connect the device to a mobile wifi hotspot to see if it works.</li> </ol>	<p>Hereby, Shenzhen Cuco Smart Technology Co.,Ltd declares that the radio equipment type gosund smart plug is compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: <a href="https://gosund-res.s3.amazonaws.com/file/1670986419824.pdf">https://gosund-res.s3.amazonaws.com/file/1670986419824.pdf</a></p> <p>Manufacturer: Shenzhen Cuco Smart Technology Co.,Ltd Address: Room201, 301, Building A, No.12, Ditu Road, Guxing Community, Xi Xiang Street, Bao'an District, Shenzhen, China, 518000. Website: www.gosund.net Email Support: service.eu@gosund.com</p> <p>The full text of the EU declaration of conformity is available at the following internet address: <a href="https://files.impro.pl/Gosund">https://files.impro.pl/Gosund</a></p>	 <p>(Made in China)</p> <p>4.02.000.0828 V2.0</p>	