


**CODE:** AWO150EMT v1.0/II  
**NAME:** Casing 7/40/DSPR/EMPTY

EN

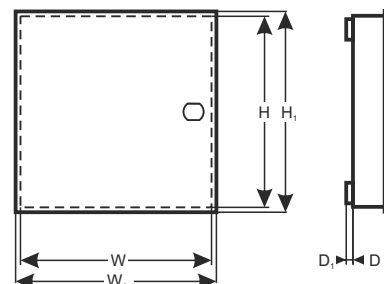

## DESTINATION

### CROW:

Alarm control panels: RUNNER4, RUNNER8, TCA824.

### DSC:

*Power Series Neo*

Alarm control panels: HS2016, HS2016-4, HS2032, HS2064, HS2128.

Modules: HSM2300, HSM2204, HSM2208, HSM2108, PCL-422.

*Power Series*

Alarm control panels: PC1832, PC1864.

Modules: PC5320, PC5100, PC5108, PC4216, PC5200, PC5204, PC5400, IT-100.

*Power Series Pro*

Alarm control panels: HS3032, HS3128, HS3248.

Modules: HSM3408, HSM2108, HSM3204CX, HSM3350, AMX-400.

Communication modules and transmitters: LE2080(R)/3G2080(R), TL280LE(R)/TL2803G, 3G2060(R) / TL2603G(R), LE2080(R)E/TL280LE(R)E.

### EBS:

Alarm control panels: PX 202A, TCA-824.

### PARADOX:

Alarm control panels: EV0192, SP65, SP4000, SP5500, 6000, 7000.

Modules: ZX4, ZX8, ZX8SP, PGM4, HUB2.

### PYRONIX:

Alarm control panels: MATRIX 424, 6, MATRIX816, 832, MATRIX832+

### RISCO:

Modules: RP432EZ8 LightSYS ProSYS Plus, RP512EZ16 ProSYS Plus.

### ROEL:

Alarm control panels: CERBER, SIGMA6, Sigma 12.

### ROGER:

Centrale: PR402, CPR 32- SE.

### SATEL:

Alarm control panels: CA-10 P, CA-4 VP, CA-5 P, CA-6 P, Integra24, 32, Micra, Perfecta16, 32, 32 LTE -T 32, Versa5,10, 15 Plus, IP.

Modules: ACCO-KP-PS, ACCO-KPWG-PS, ACCO-NT, CA-10 E, MST-1, CA-64 PTSA, ETHM-1 Plus, ETHM-2, GSM-X, GSM-X LTE, INT-ADR, INT-AV, INT-E, INT-FI, INT-GSM, INT-KNX-2, INT-O, INT-PP, INT-R, INT-RS Plus, INT-VG, INT-VMG.

### TELMOR:

Alarm control panels: TCA-824.

*Documentation shows which devices can be installed in a given enclosure. It does not define how many different devices can be installed in one enclosure. Number of installed devices depends on their size and arrangement.*

## TECHNICAL DATA

<b>External dimensions of enclosure</b>	W=280, H=290, D+D <sub>1</sub> =80+8 [±2 mm]
<b>External dimensions of front panel</b>	W <sub>1</sub> =285, H <sub>1</sub> =295 [±2 mm]
<b>Recommended battery/batteries</b>	7 Ah / 12 V (SLA)
<b>Net/gross weight</b>	1,55 / 1,65 [kg]
<b>Transformer</b>	Not included, possibility of installing: AWT050, AWT053, AWT150, AWT468
<b>Operating conditions</b>	-10°C ÷ +40°C, relative humidity 20%...90%, without condensation
<b>Material</b>	Steel sheet DC01, thickness 0,7 mm, anticorrosion protection, colour RAL9003
<b>Destination</b>	Inside
<b>Warranty</b>	2 years
<b>Notes</b>	Assembly kit PKAZ158, designed for enclosure, includes: tamper switch, earthing wires, wire connector, ..... Possibility of installing lock MR008 / MR027 Possibility of mounting tamper switch PKAZ066 detects detachment from wall